



292/530 EM

Dimensions

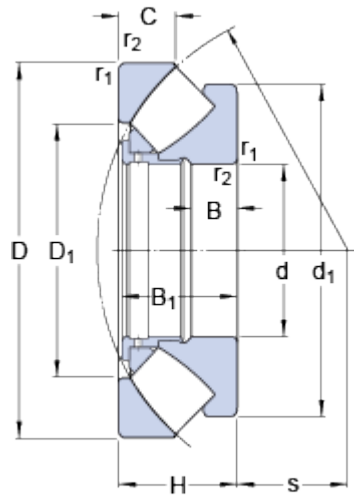

d	530	mm
D	710	mm
H	109	mm
d ₁	≈ 675	mm
D ₁	≈ 608	mm
B	32	mm
B ₁	105	mm
C	56	mm
s	285	mm
r _{1,2}	min. 5	mm

Abutment dimensions

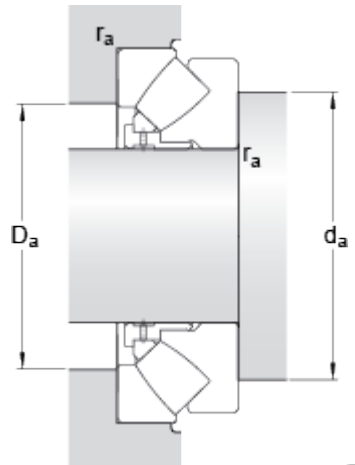

d _a	min. 620	mm
D _a	max. 655	mm
r _a	max. 4	mm

Calculation data

Basic dynamic load rating	C	3110	kN
Basic static load rating	C ₀	15300	kN
Fatigue load limit	P _u	1220	kN
Reference speed		530	r/min
Limiting speed		850	r/min
Minimum axial load factor	A	22	

Mass

Mass bearing		115	kg
--------------	--	-----	----