





29230 E

Dimensions

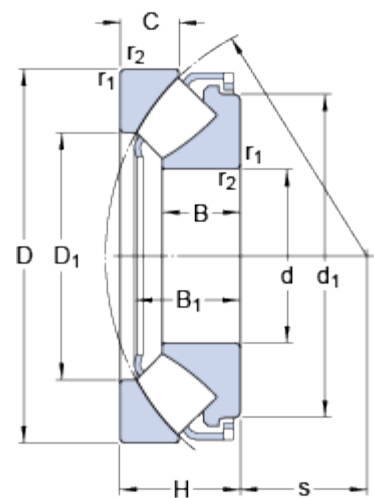

d	150	mm
D	215	mm
H	39	mm
d ₁	≈ 200	mm
D ₁	≈ 176	mm
B	24	mm
B ₁	34.3	mm
C	20.5	mm
s	82	mm
r _{1,2}	min. 1.5	mm

Abutment dimensions

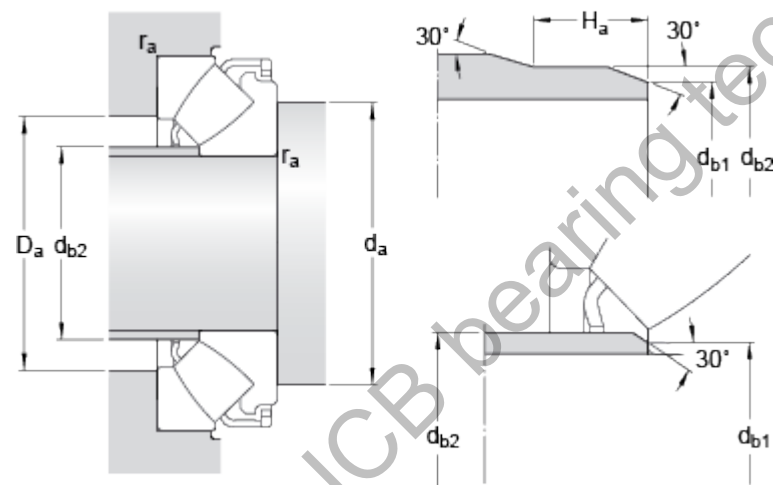

d _a	min.	180	mm
d _{b1}	max.	154	mm
d _{b2}	max.	154	mm
H _a	min.	14	mm
D _a	max.	193	mm
r _a	max.	1.5	mm

Calculation data

Basic dynamic load rating	C	408	kN
Basic static load rating	C ₀	1600	kN
Fatigue load limit	P _u	180	kN
Reference speed		1800	r/min
Limiting speed		2800	r/min
Minimum axial load factor	A	0.24	

Mass

Mass bearing	4.3	kg
--------------	-----	----