





29244 E

Dimensions

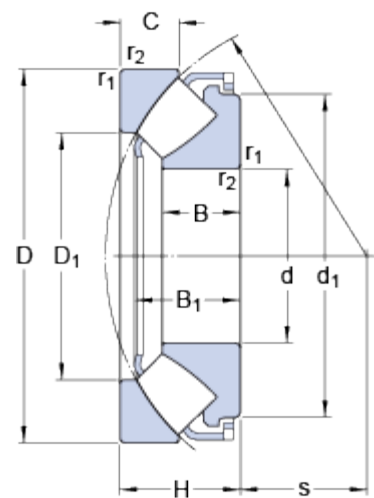

d	220	mm
D	300	mm
H	48	mm
d ₁	≈ 280	mm
D ₁	≈ 252	mm
B	30	mm
B ₁	43.4	mm
C	24.5	mm
s	117	mm
r _{1,2}	min. 2	mm

Abutment dimensions

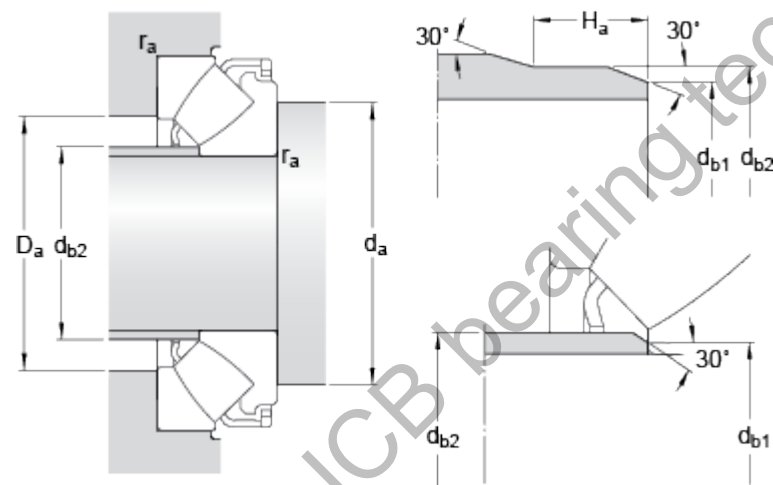

d _a	min.	255	mm
d _{b1}	max.	224.5	mm
d _{b2}	max.	227	mm
H _a	min.	17	mm
D _a	max.	271	mm
r _a	max.	2	mm

Calculation data

Basic dynamic load rating	C	690	kN
Basic static load rating	C ₀	3000	kN
Fatigue load limit	P _u	310	kN
Reference speed		1300	r/min
Limiting speed		2200	r/min
Minimum axial load factor	A	0.86	

Mass

Mass bearing	10	kg
--------------	----	----