



29268 E

Dimensions

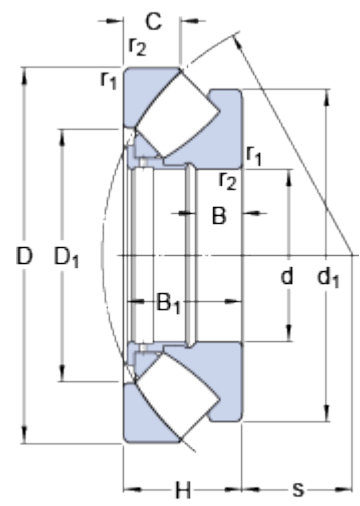

d		340	mm
D		460	mm
H		73	mm
d ₁	≈	445	mm
D ₁	≈	395	mm
B		21	mm
B ₁		69	mm
C		37.5	mm
s		183	mm
r _{1,2}	min.	3	mm

Abutment dimensions

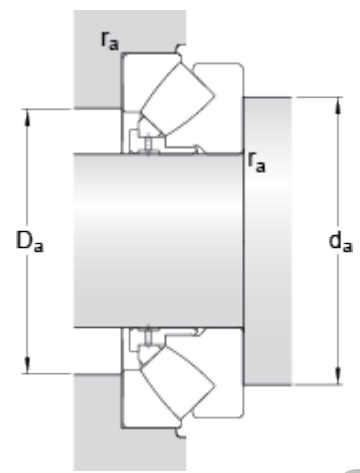

d _a	min.	400	mm
D _a	max.	422	mm
r _a	max.	2.5	mm

Calculation data

Basic dynamic load rating	C	1130	kN
Basic static load rating	C ₀	5400	kN
Fatigue load limit	P _u	480	kN
Reference speed		850	r/min
Limiting speed		1300	r/min
Minimum axial load factor	A	2.8	

Mass

Mass bearing		33.5	kg
--------------	--	------	----