



29268

Dimensions

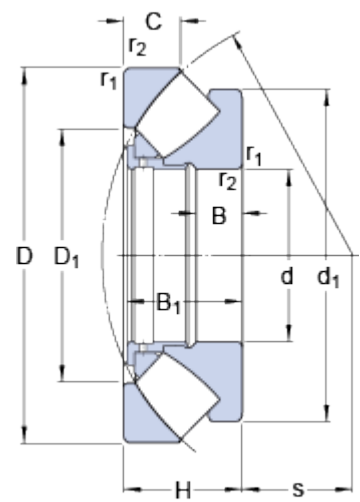

d	340	mm
D	460	mm
H	73	mm
d ₁	≈ 445	mm
D ₁	≈ 395	mm
B	21	mm
B ₁	69	mm
C	37.5	mm
s	183	mm
r _{1,2}	min. 3	mm

Abutment dimensions

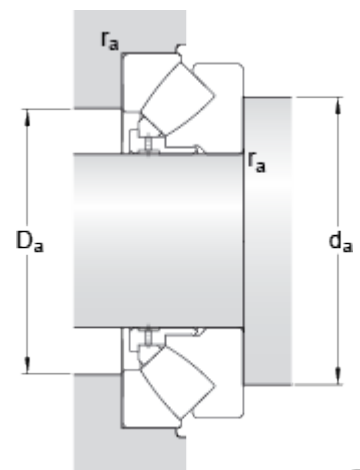

d _a	min. 400	mm
D _a	max. 422	mm
r _a	max. 2.5	mm

Calculation data

Basic dynamic load rating	C	1130	kN
Basic static load rating	C ₀	5400	kN
Fatigue load limit	P _u	480	kN
Reference speed		850	r/min
Limiting speed		1300	r/min
Minimum axial load factor	A	2.8	

Mass

Mass bearing		33.5	kg
--------------	--	------	----