





29464 E

Dimensions

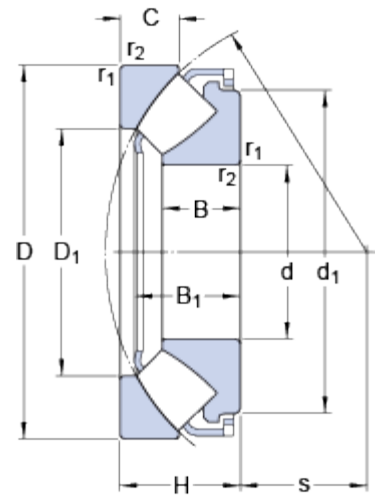

d	320	mm
D	580	mm
H	155	mm
d ₁	≈ 520	mm
D ₁	≈ 422	mm
B	102	mm
B ₁	139.4	mm
C	74.5	mm
s	191	mm
r _{1,2}	min. 7.5	mm

Abutment dimensions

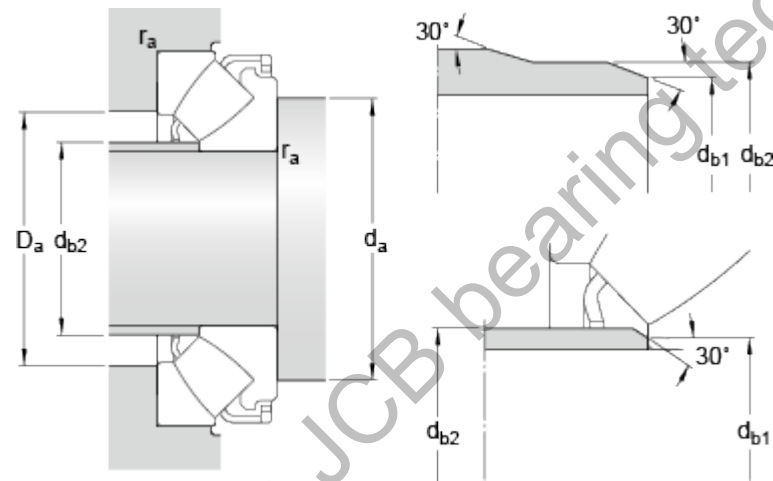

d _a	min.	450	mm
d _{b1}	max.	344	mm
d _{b2}	max.	367	mm
D _a	max.	500	mm
r _a	max.	6	mm

Calculation data

Basic dynamic load rating	C	5700	kN
Basic static load rating	C ₀	19000	kN
Fatigue load limit	P _u	1530	kN
Reference speed		600	r/min
Limiting speed		1100	r/min
Minimum axial load factor	A	32	

Mass

Mass bearing	175	kg
--------------	-----	----