





29472 EM

Dimensions

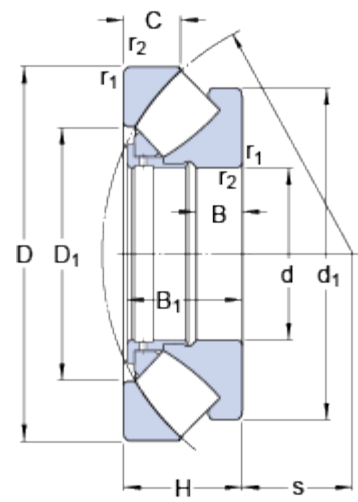

d		360	mm
D		640	mm
H		170	mm
d ₁	≈	580	mm
D ₁	≈	474	mm
B		63	mm
B ₁		164	mm
C		83.5	mm
s		210	mm
r _{1,2}	min.	7.5	mm

Abutment dimensions

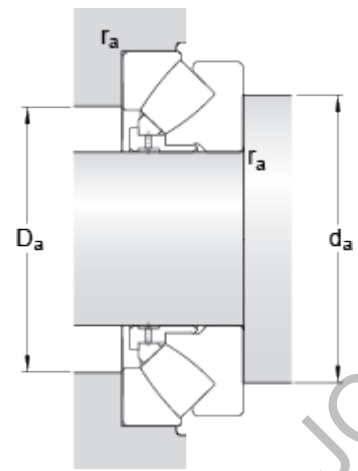

d _a	min.	495	mm
D _a	max.	550	mm
r _a	max.	6	mm

Calculation data

Basic dynamic load rating	C	6200	kN
Basic static load rating	C ₀	21200	kN
Fatigue load limit	P _u	1630	kN
Reference speed		560	r/min
Limiting speed		950	r/min
Minimum axial load factor	A	41	

Mass

Mass bearing		230	kg
--------------	--	-----	----