





29480 E

Dimensions

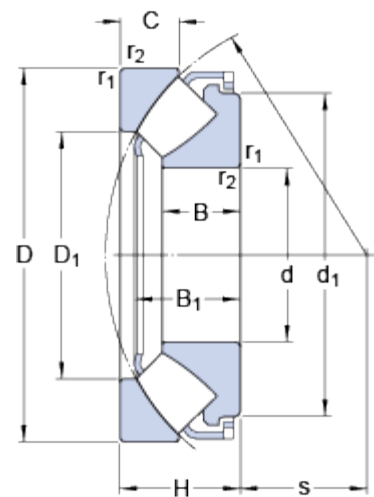

d	400	mm
D	710	mm
H	185	mm
d ₁	≈ 645	mm
D ₁	≈ 525	mm
B	120	mm
B ₁	165.6	mm
C	89.5	mm
s	234	mm
r _{1,2}	min. 7.5	mm

Abutment dimensions

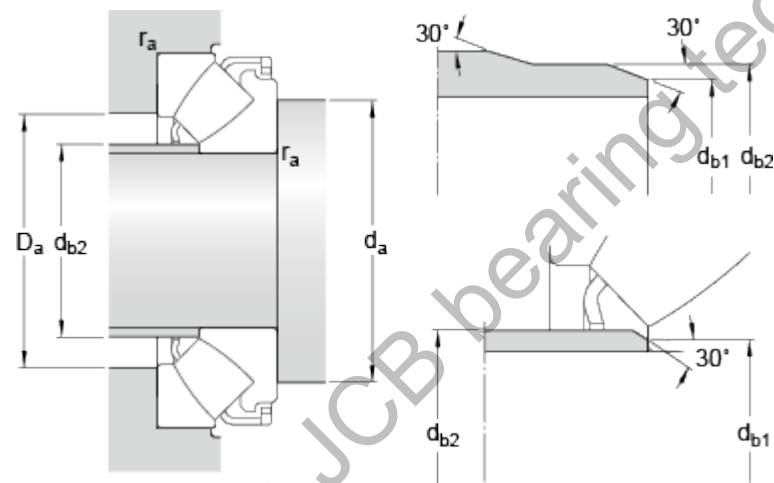

d _a	min. 550	mm
d _{b1}	max. 431	mm
d _{b2}	max. 458	mm
D _a	max. 615	mm
r _a	max. 6	mm

Calculation data

Basic dynamic load rating	C	6560	kN
Basic dynamic load rating	C	7650	kN
Basic static load rating	C ₀	26500	kN
Fatigue load limit	P _u	1960	kN
Reference speed		480	r/min
Limiting speed		850	r/min
Minimum axial load factor	A	62	

Mass

Mass bearing	310	kg
--------------	-----	----